

CLIMA HOSTELERÍA



Code: EMP.6IG030

LPG or Natural Gas

Magnet safety valve and pilot taps.

Piezoelectric ignition system for each module.

Easy to clean and hygienic


Whole exterior body stainless steel

Top plate thickness 1.5mm body 1mm stainless steel


Protection plate made of stainless steel prevents oil splashes on the back and sides.

Through the large oil drain hole, the waste oil generated during cooking flows easily into the reservoir. The oil tank can be easily removed from the front of the device.


Front

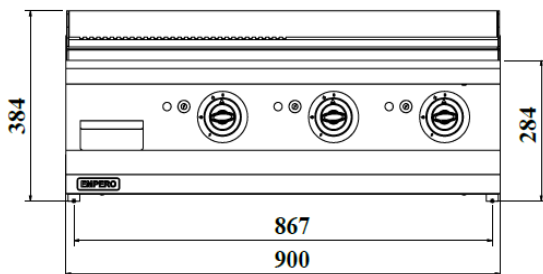

Side

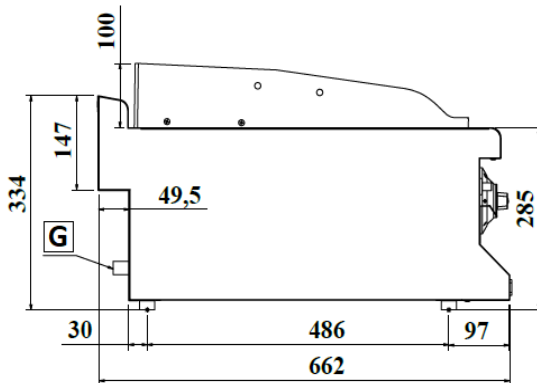

Back

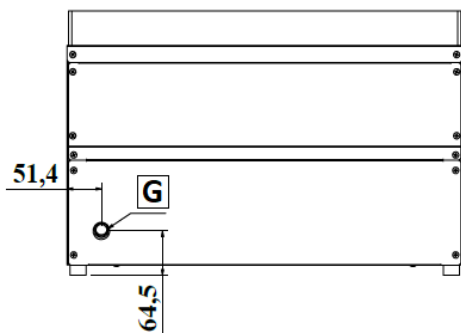

G-Gas inlet

installation information

Total power	19.5 kW
Gas consumption NG	2,06 m ³ /h
Gas consumption LPG	1,29 kg/h

Temel Bilgiler

Lenght	900 mm
Depth	664 mm
Height	285 mm
Net weight	83,5 kg
m ³ :	0.24
Packed Lenght	1000 mm
Packed depth	760 mm
Packed height	600 mm
Packed weight	96,5 mm

If this device is placed near the other devices that have heat sensitiveness or furniture. It has to be leaved distance minimum 150 mm or must be provided by isolation